

Transforming The **Transportation**Thus Nation

"Our bit towards the eMobility drive"

with the best range of lithium batteries











- 100% Capacity Guaranteed 🗲
 - Instant Replacement 🗲
 - Portable Charger 🗲
 - Made in India 🗲







eRickshaw Battery

LFP / NCM



Remote Battery Lock / Cut off



Smart Phone Connectivity



Quick Charging



Tailored Enclosure



Theft Protection-GPS Tracking



Digital Display



Plug n Play Module



Swappable Battery Long Battery Life 3,00,000 Kms

Long Mileage Cover 103 Kms / Charge

Low Running Cost 32 Paisa / Km





Future Hi-Tech has focussed on lithium technology now nearly since 12 years and has established an intelligent manufacturing technology.

eRickshaw batteries are available in Li-ion & LFP, cylindrical and prismatic variants, well designed as per Indian environment and road conditions.

Cost effectiveness, standardization, portability make these batteries compatible with Government of India e-mobility policies.

Battery/Enclosure dimensions/Shapes/Capacities can be customized as per vehicle requirements.

When the battery reaches end of life, we provide support to the customer to manage collection and recycling of such batteries through the recognised specialists.

SALIENT FEATURES

- **★** Eco friendly
- ✓ Quick charge
- ✓ Plug and Play battery
- ✓ Built in BMS for protection
- ≠ 100% charge/discharge efficiency
- ✓ No maintenance
- ✓ Customizable enclosure
- ✓ Digital Display

PROTECTION

- ✓ Shock absorption
- ✓ Over temperature cut-off
- ✓ Over voltage cut-off
- ✓ Short circuit protection
- Reverse polarity
- ✓ Over charge/discharge Cut-off

Battery Management System With Digital Display

Our dynamic /smart BMS is specially designed for rechargeable lithium battery packs to enhance efficiency and performance of complete solution.

This communicative BMS monitors, all cells current and voltage fluctuations in pack and temperature of pack.

Display of all parameters prompt to take required actions timely.

Available in two models, one with elaborated information and other is basic.

Dynamic BMS Features

- ✓ SOC/SOH
- Programmable
- Active balancing feature
- Individual cell monitoring
- ✓ Temperature monitoring
- Short circuit protection
- GPS communicative BMS
- Under/over voltage protection at cell & pack level
- Over current protection (charge, discharge)

Smart BMS Features

- ✓ SOC/SOH
- Voltage display
- Current display



Vpack: 49.79V I_chg: 0.00A

 T_{-}

T_Max: +19 °C T_Min: +18 °C

SOC: 48%



OPTIONAL FEATURES

- **✓** Communicative BMS
- **←** CAN Compatible
- ✓ Swappable Battery
- ✓ Portable Charger



Technical Specification

Sr. No.	Parameters	Factor	Unit	
1	Series			
2	Models			
3	Voltage Cut-off (Operting Voltage Ranges)	Upper	V	
		Lower		
4	Conitnuous Discharge Current	A		
5	Charge Current			
6	Internal Resistance	mΩ		
7	Peak Discharge Current	ent Pulse for 5s		
8	Compatible Motor	W		
9	Dimensions I x w x h		mm	
	Operating Temperature	Charging	- °C	
10		Discharging		
11	Charging time (CC/CV)	hr		
12	Weight	kg		
13	Mileage **	Total	km	
		Average Per charge	KIII	
14	Running Cost	Rs. / km		

^{*}Flexible. Values may vary.


^{*}Communication Optional


^{*}IP Option Available

^{*}Connectors - Anderson

^{**}Tested under ideal conditions



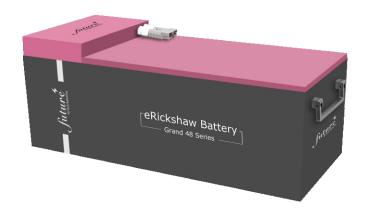

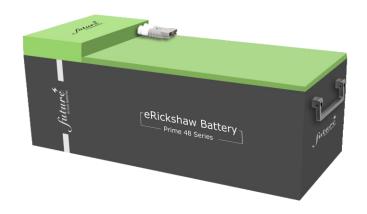

48 V 60 A	h (3 Kwh)	48 V 80 Ah (4 Kwh)		48 V 100Ah (5 kWh)	
Grand	Prime	Grand	Prime	Grand	Prime
FP091	LH140	FP052	LH141	FP048	LH088
58.4	58.8	58.4	58.8	58.4	58.8
40	39.2	40	39.2	40	39.2
6	60	60		60	
2	20	20 to 30		20 to 30	
80	120	80	120	80	120
90	90	90	90	90	90
10	000	1000		1000	
400 x 26	60 X 240	620 x 260 x 240		650x310x230	
0 ~	· 45	0 ~ 45		0 ~ 45	
-20 ~ 60	0 ~ 45	-20 ~ 60	0 ~ 45	-20 ~ 60	0 ~ 45
3 -	~ 4	3~4		3.5 ~ 4.5	
30	23	42	31	47	40
1,82000	51,000	2,43,000	63,000	3,05,000	79,000
5	55	75		95	
0.35	0.97	0.32	0.97	0.32	0.97



We are committed to deliver world class energy solutions in a safe, reliable, efficient and environmentally sound manner.

We are certified for the essential parameters of the industry which includes:



Further product qualify and some are certified : AIS / R-10 / R-100 / UN38.3 / UNR136 / UL2271 / UL2054 / UL2580

Future Hi-Tech Batteries Ltd.

Manufacturing Unit
C-183.Phase-V111-I

C-183,Phase-V111-B,Industrial Focal Point, S.A.S. Nagar (Mohali)-160071 Punjab,India. +911724670013 care@fhtbl.com U.K. Office

1105, Cascades Tower, London E148JN, UK +447850793930 sp@fhtbl.com

sp@ii









Creating Eco Friendly, Safe & Green Batteries